








PRAN ELECTRONICS PVT. LTD.

52, GIDC, Makarpura, Vadodara - 390 010. India.
Phone : +91 - 265 - 263 2916, 263 5920 Fax : + 91 - 265 - 263 5918
E-mail : info@pranelectronics.com Web : www.pranelectronics.com

AN ISO 9001:2000 COMPANY

Slide Switches: 1P2T with Straight and side knobs
Part Code: 70-1260, 1P2T slide switch with straight knob

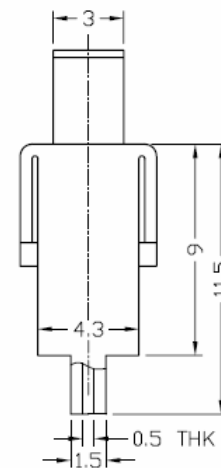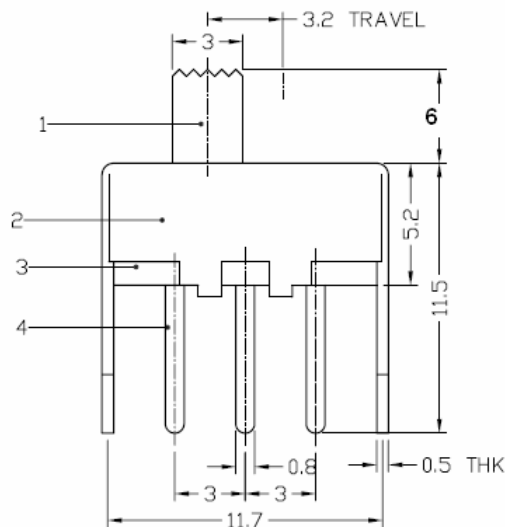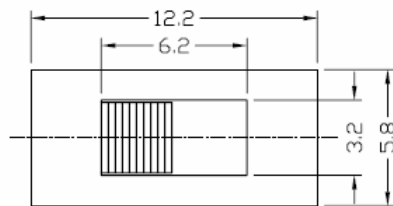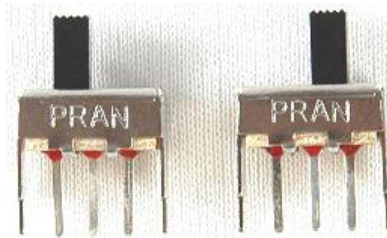

SPECIFICATIONS:

CONTACT: 1P2T- SILVER PLATED

RATING: 0.3A X 30 V DC

CONTACT RESISTANCE: 30 milli Ohms max.

INSULATION RESISTANCE: 100 M Ohms min. 500 V DC

PROOF VOLTAGE: 500 V AC for 1 min.

OPERATING FORCE: 150 + 100 gf

OPERATING LIFE: 50,000 cycles





PRAN ELECTRONICS PVT. LTD.

52, GIDC, Makarpura, Vadodara - 390 010. India.
Phone : +91 - 265 - 263 2916, 263 5920 Fax : + 91 - 265 - 263 5918
E-mail : info@pranelectronics.com Web : www.pranelectronics.com

AN ISO 9001:2000 COMPANY

Part Code: 70-1260-S, 1P2T silde switch with side knob

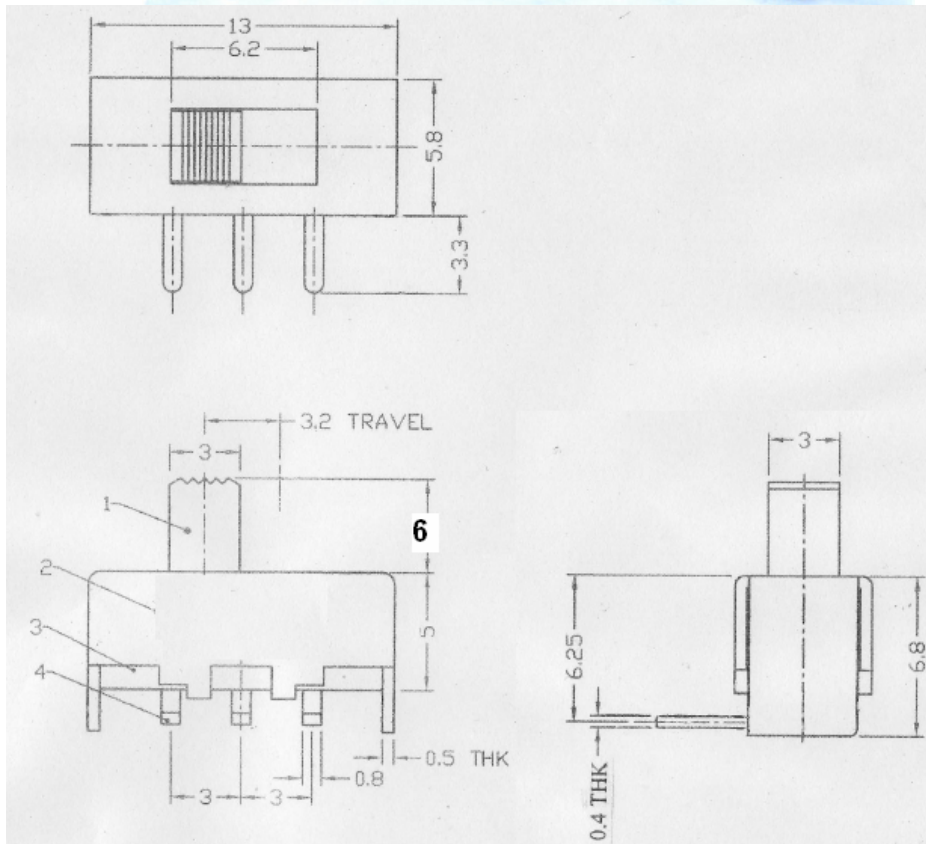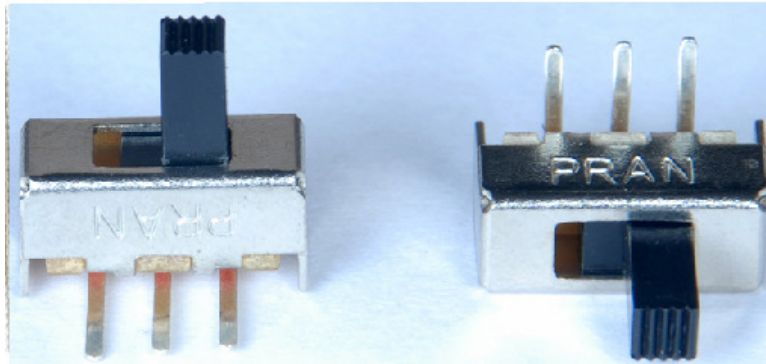

SPECIFICATIONS:

CONTACT: 1P2T- SILVER PLATED

RATING: 0.3A X 30 V DC

CONTACT RESISTANCE: 30 milli Ohms max.

INSULATION RESISTANCE: 100 M Ohms min. 500 V DC

PROOF VOLTAGE: 500 V AC for 1 min.

OPERATING FORCE: 150 + 100 gf

OPERATING LIFE: 50,000 cycles