




PART NUMBER: 60-1S2-043
DESCRIPTION: 3.5X6X4.3mm 3.5x6 STANDARD TACT SWITCH

PART NUMBER: 60-1S2-050
DESCRIPTION: 3.5X6X5.0mm 3.5x6 STANDARD TACT SWITCH


ROHS COMPLIANT



H
4.3
5.0



CIRCUIT DIAGRAM



P.C.B DIMENSION

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm





Dimensional tolerance +/- 0.2mm




PART NUMBER: 60-1A2-043
DESCRIPTION: 3.5X6X4.3mm 3.5x6 RADIAL TACT SWITCH

PART NUMBER: 60-1A2-050
DESCRIPTION: 3.5X6X5.0mm 3.5x6 RADIAL TACT SWITCH


ROHS COMPLIANT

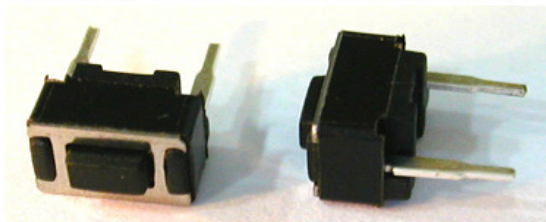

H
4.3
5.0



CIRCUIT DIAGRAM



P.C.B DIMENSION

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm

Dimensional tolerance +/- 0.2mm

