





PART NUMBER: SMD-MINI-21-DP

DESCRIPTION: 2.3X4.6X1.8mm MINI SMD TACT SWITCH DUST PROOF



ROHS COMPLIANT

DUST PROOF

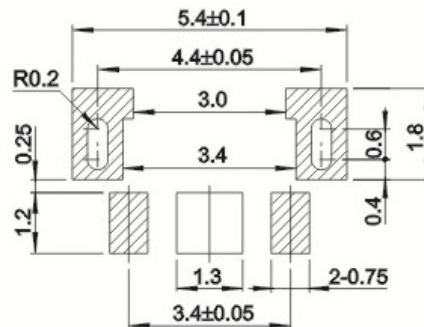



SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.15 ± 0.05 mm


Dimensional tolerance +/- 0.2mm

PART NUMBER: SMD-3560-07 -DP

DESCRIPTION: 3.7X6.1X2.5mm 3.5x6.0 SMD TACT SWITCH

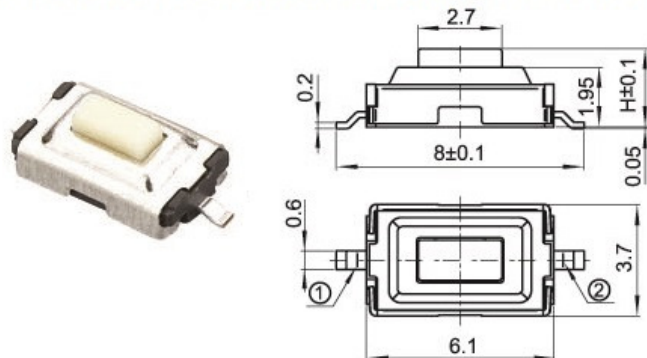

H
2.5
2.7





ROHS COMPLIANT

DUST PROOF



PART NUMBER: SMD-3560-08 -DP

DESCRIPTION: 3.7X6.1X2.5mm 3.5x6.0 SMD TACT SWITCH

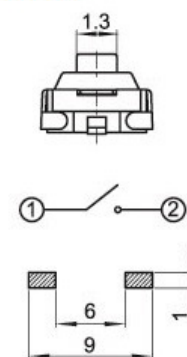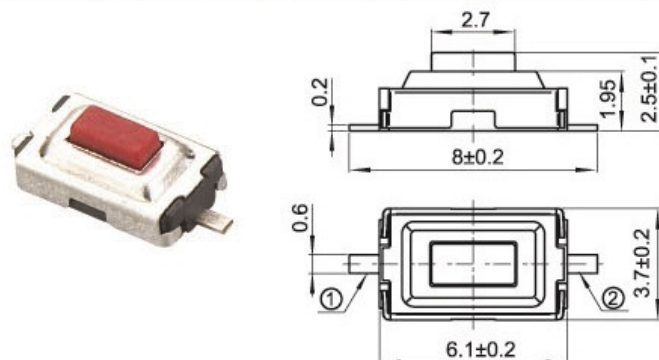

PART NUMBER: SMD-3560-09-DP

DESCRIPTION: 3.7X6.1X2.5mm 3.5x6.0 SMD TACT SWITCH

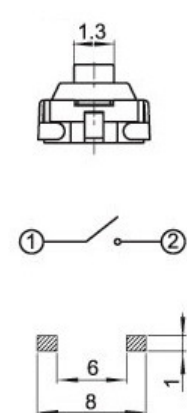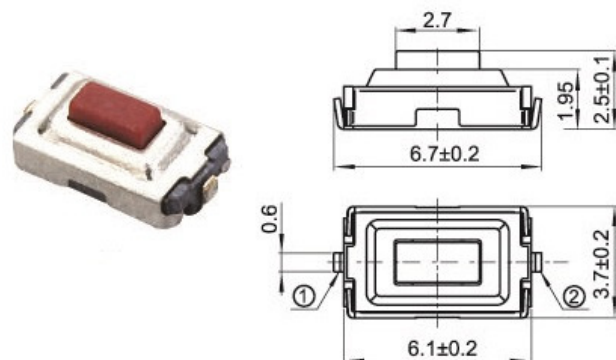

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	30,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm

Dimensional tolerance +/- 0.2mm





PART NUMBER: SMD-5252-05-DP




DESCRIPTION: 5.2X5.2XHmm 5.2x5.2 SMD TACT SWITCH DUST PROOF

ROHS COMPLIANT

DUST PROOF



H
1.5
1.7
2.0
...





SPECIFICATIONS




Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-5252-06-DP

DESCRIPTION: 5.2X5.2XHmm 5.2x5.2 SMD TACT SWITCH DUST PROOF



H
1.5
1.7
2.0
...



Dimensional tolerance +/- 0.2mm









PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-5252-07-DP

DESCRIPTION: 5.2X5.2XHmm 5.2X5.2 SMD TACT SWITCH WITH EARTHING TERMINAL DUST PROOF

ROHS COMPLIANT

DUST PROOF


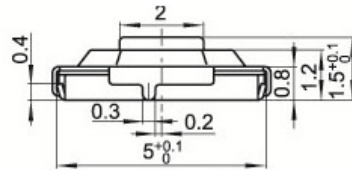


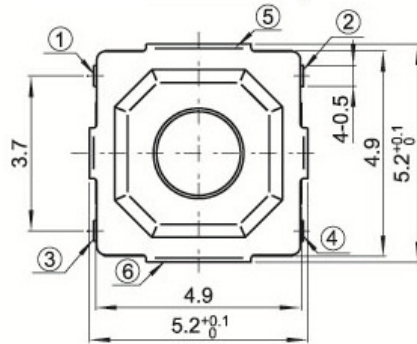



SPECIFICATIONS

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-5252-08-DP

DESCRIPTION: 5.2X5.2XHmm 5.2X5.2 SMT TACT SWITCH WITH EARTHING TERMINAL DUST PROOF

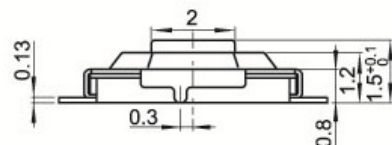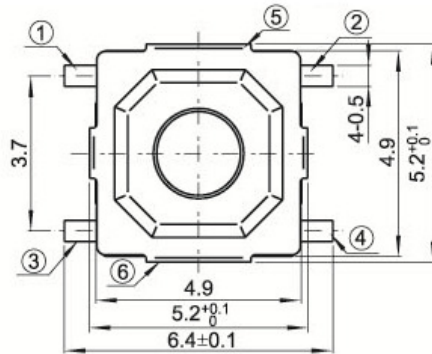

Dimensional tolerance +/- 0.2mm



PRAN ELECTRONICS PVT. LTD.
INDIA.




PART NUMBER: SMD-6262-03-DP

DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH DUST PROOF





ROHS COMPLIANT

DUST PROOF



H
3.1
5.0



SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	300,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm

Dimensional tolerance +/- 0.2mm

