
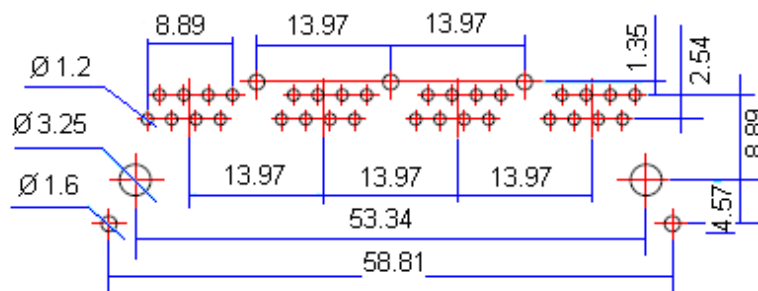


Part No: JP-S1-8P8C-4Port-S-XX

XX = Plating Options: 03, 06, 15, 30, 50



RoHS Compliant


Electrical Specifications:

Voltage rating: 125 VAC RMS
 Current rating: 1.5 A
 Contact resistance: 40 mohms max.
 Insulation resistance: 1000 Mohms min.
 Voltage Proof: 1000 V AC, 1 min.

Mechanical:

Housing, Insert: Thermoplastic UL94V0
 Contact: PhBz 0.46 dia. wire
 Plating: Gold 3U" standard
 options 6, 15, 30 or 50U"
 Operating life: 750 cycles min.
 Operating temp: -20 to 70 Deg. C
 Wave soldering: 255~265 Deg. 5 to 7
 seconds max.

Mates with Modular Plug conforming
 to FCC part 68, subpart F

PRODUCT: RJ45 Shielded Modular Jack 4Port	
DIMENSIONS: MM TOLERANCE: ± 0.2 MM	
CHECKED BY:	DATE:
APPROVED BY:	DATE:
 Pran Electronics Pvt. Ltd. 52 G.I.D.C. Makarpura Vadodara 390 010. INDIA. Phone: [0265] 263 2916 / 5920. Fax: 263 5918. Email: info@pranelectronics.com	