
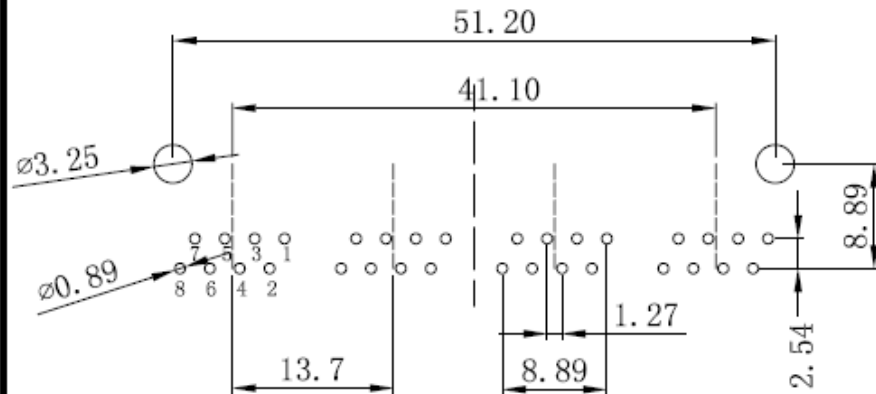


RoHS
Compliant

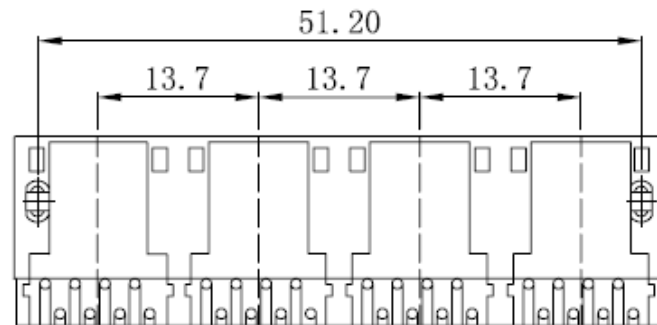

PC Board Layout (TOP VIEW)
Component Side Shown

PCB JACK Electrical:

1. Insulation Resistance: 500 Megohms Min@500VDC.
2. Dielectric Strength: 1000VAC RMS 50Hz 1Min.
3. Operating: 750 Cycles Min.
4. Plating Gold Thickness: 3u"/6u"/15u"/30u"/50u"
5. Wave solder tip temperature: 265°C Max
Wave solder tip temperature time: 5 Sec Max.

Environmental:

1. Storage: -40°C ~ +85°C.
2. Operation: -40°C ~ +85°C.

Part code: JP-T1-8P8C-4P-XX

replace XX with gold plating: 03,06,15,30,50 u"

PRAN ELECTRONICS PVT. LTD.
INDIA

REV: 00 10/01/2008