


PART NUMBER: SMD-6262-01


DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH

ROHS COMPLIANT

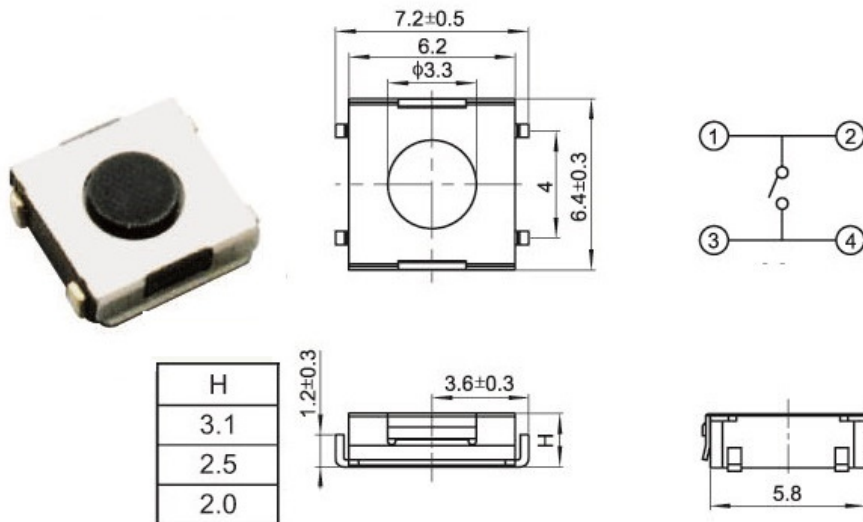


PART NUMBER: SMD-6262-02

DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH

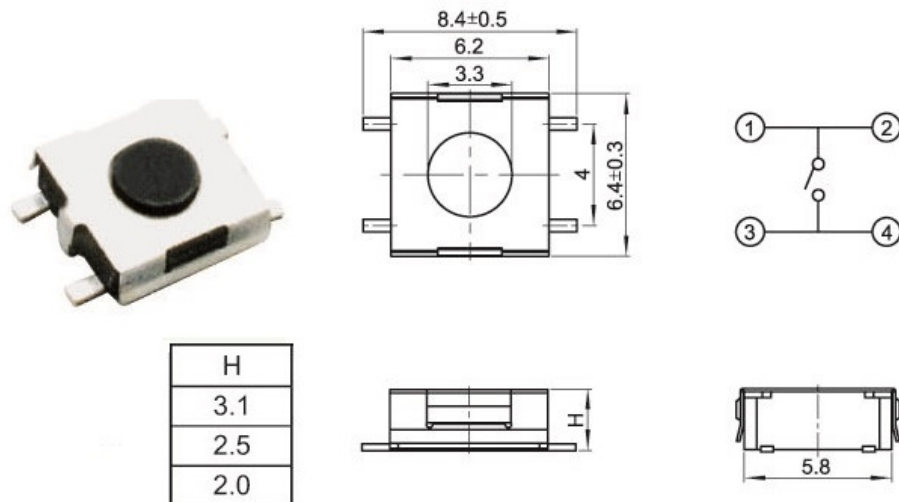

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	300,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm



Dimensional tolerance +/- 0.2mm






PART NUMBER: SMD-6262-03-DP

DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH DUST PROOF





ROHS COMPLIANT

DUST PROOF



H
3.1
5.0



SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	300,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm


Dimensional tolerance +/- 0.2mm



PART NUMBER: SMD-6262-04


DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH

ROHS COMPLIANT

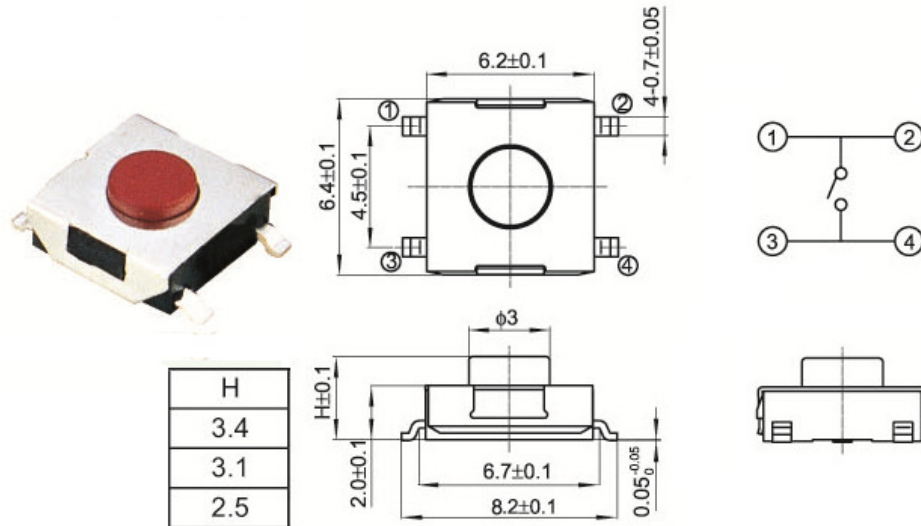

PART NUMBER: SMD-6262-05

DESCRIPTION: 6.2X6.2XHmm 6.2X6.2 SMD TACT SWITCH

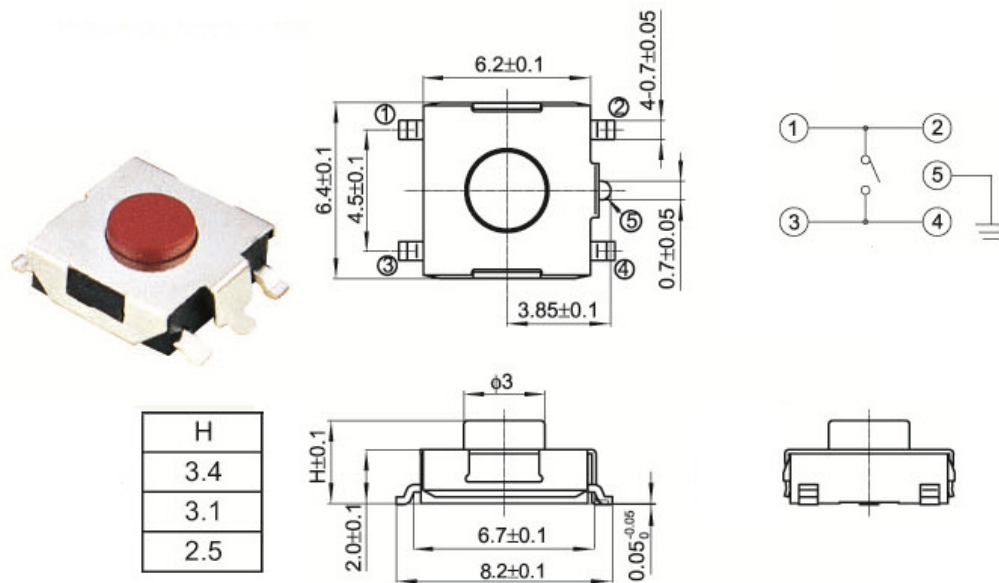

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm



Dimensional tolerance +/- 0.2mm

PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-6262-06



DESCRIPTION: 6.2X6.2X3.5mm 6.2X6.2 SMD TACT SWITCH

ROHS COMPLIANT

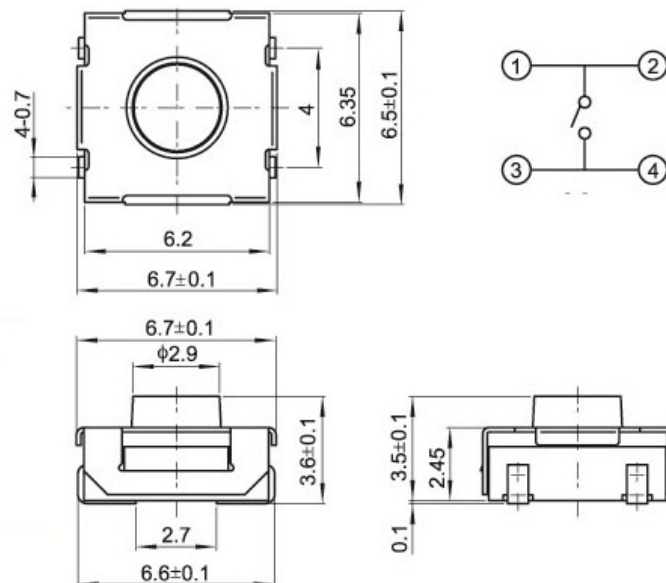

PART NUMBER: SMD-6262-07

DESCRIPTION: 6.2X6.2X3.5mm 6.2X6.2 SMD TACT SWITCH

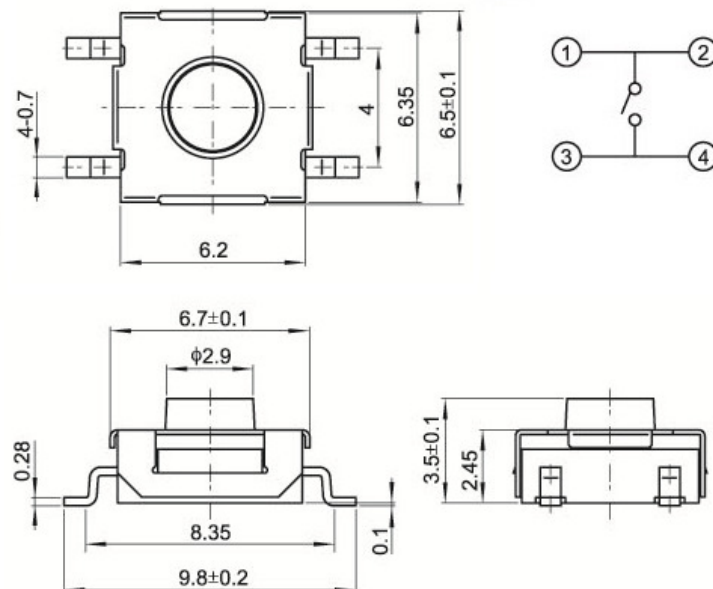

SPECIFICATIONS

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	300,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.35 ± 0.1mm





Dimensional tolerance +/- 0.2mm



PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-6262-08-WP

DESCRIPTION: 6.2X6.2X3.1mm 6.2X6.2 SMD TACT SWITCH WATERPROOF

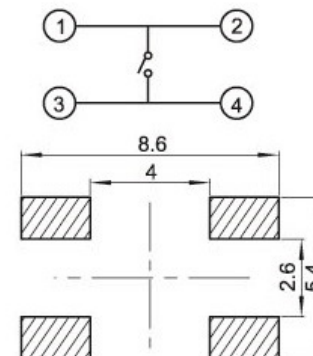


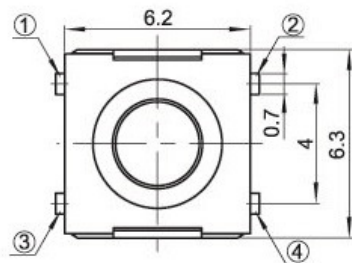


ROHS COMPLIANT

WATERPROOF

PART NUMBER: SMD-6262-09-WP

DESCRIPTION: 6.2X6.2X5.0mm 6.2X6.2 SMD TACT SWITCH WATERPROOF





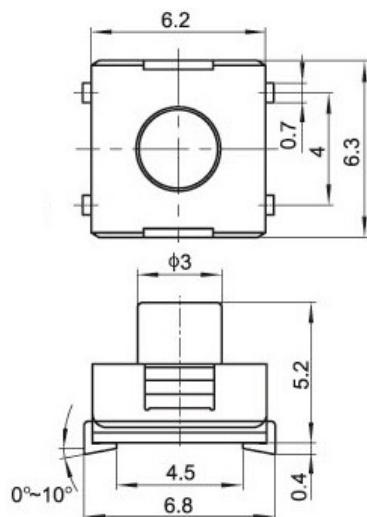


SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	100,000 Cycles
Mechanical performance	Operating force	180gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-6262-10-WP

DESCRIPTION: 6.2X6.2X2.3mm 6.2X6.2 SMD TACT SWITCH WATERPROOF



Dimensional tolerance +/- 0.2mm

REV.00 DATE 08/04/2020



PRAN ELECTRONICS PVT. LTD.
INDIA.