
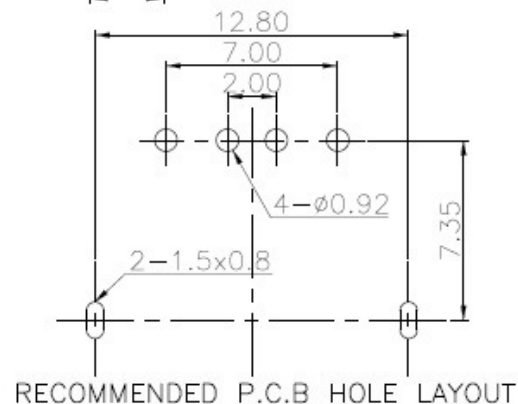
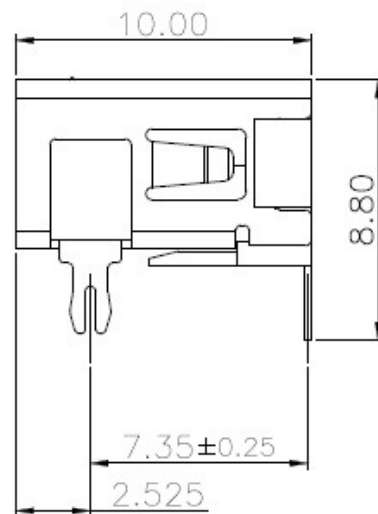
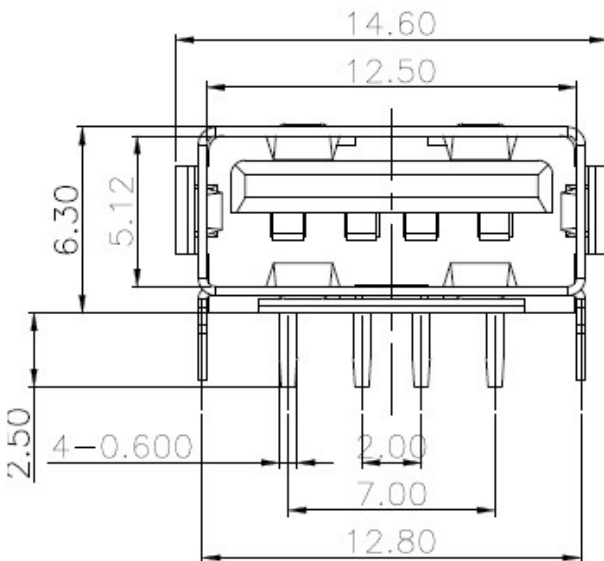


ROHS COMPLIANT

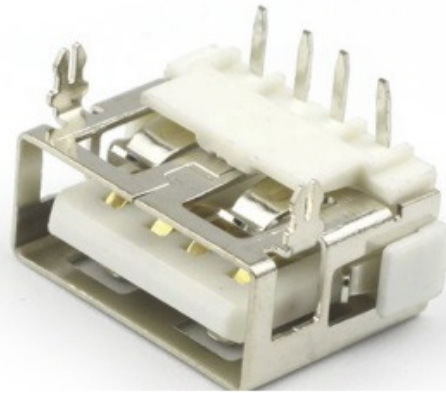

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 30V 1.5A
- 1-2.CONTATCT RESISTANCE: $\leq 30\text{m}\Omega$
- 1-3.INSULATION RESISTANCE: $\geq 1000\text{M}\Omega$ DC 500V
- 1-4.WITHSTANDING VOLTAGE: AC 500V 1min
- 1-5.LIFE: 5,000 CYCLES

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE: 35N Max
- EXTRACTION FORCE: 10N Min

3.Finish:

3-1.TERMINAL:

GOLD $<1\mu\text{m}>$ PLATING ON CONTACT AREA
 TIN $<2-5\mu\text{m}>$ PLATING ON OTHER AREA
 NICKEL $<1-3\mu\text{m}>$ UNDERPLATING OVERALL

3-2.SHELL:

NICKEL $<1-3\mu\text{m}>$ PLATING

PART NUMBER: USB-AF-20-025



DESCRIPTION: USB A 2.0 90 DEG. 10MM
 WITHOUT EDGE CURL

DIMENSION TOLERANCE $\pm 0.2\text{mm}$

REV. 0 DATE 28/04/2020

P PRAN ELECTRONICS PVT. LTD.
INDIA.

ROHS COMPLIANT

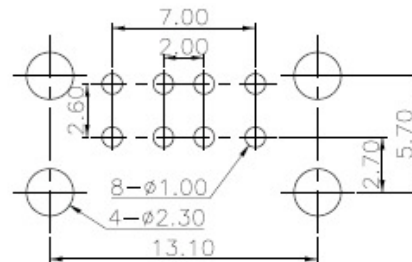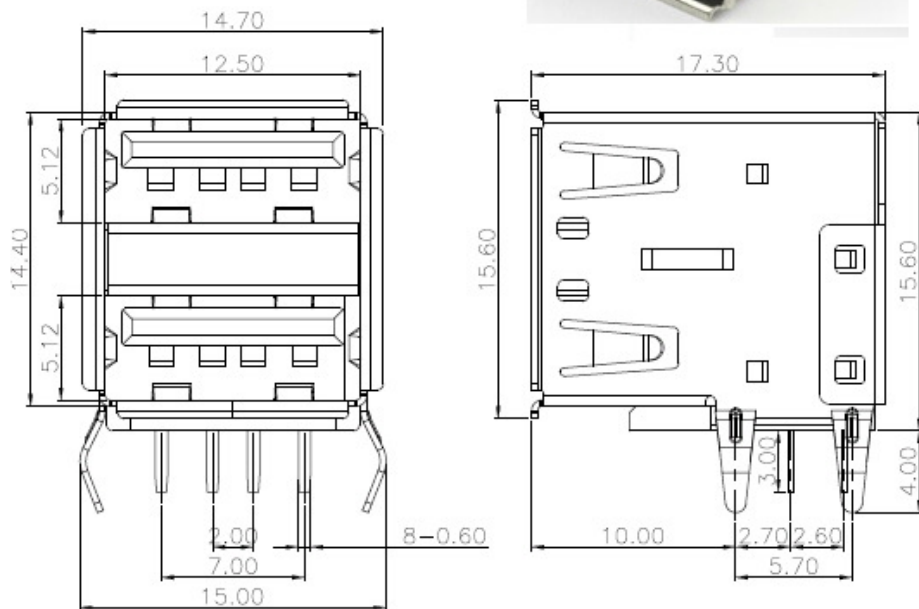

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 30V 1.5A
- 1-2.CONTATCT RESISTANCE: $\leq 30\text{m}\Omega$
- 1-3.INSULATION RESISTANCE: $\geq 1000\text{M}\Omega$ DC 500V
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min
- 1-5.LIFE:5,000 CYCLES

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE:35N Max
- EXTRACTION FORCE:10N Min

3.Finish:

3-1.TERMINAL:

GOLD $<1\mu\text{m}$ > PLATING ON CONTACT AREA
 TIN $<2-5\mu\text{m}$ > PLATING ON OTHER AREA
 NICKEL $<1-3\mu\text{m}$ > UNDERPLATING OVERALL

3-2.SHELL:

NICKEL $<1-3\mu\text{m}$ > PLATING

PART NUMBER: USB-AF-20-029

DESCRIPTION: USB A 2.0 90 DEG. DUAL 1X2
 STACKED CONNECTOR WITH EDGE CURL



DIMENSION TOLERANCE $\pm 0.2\text{mm}$

P PRAN ELECTRONICS PVT. LTD.
INDIA.

REV. 0 DATE 28/04/2020

RECOMMENDED P.C.B HOLE LAYOUT

ROHS COMPLIANT

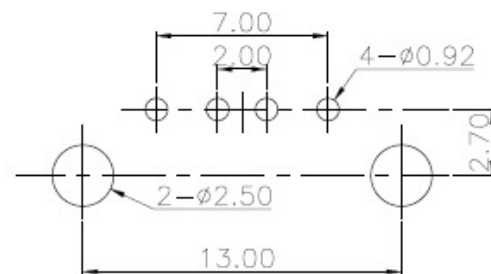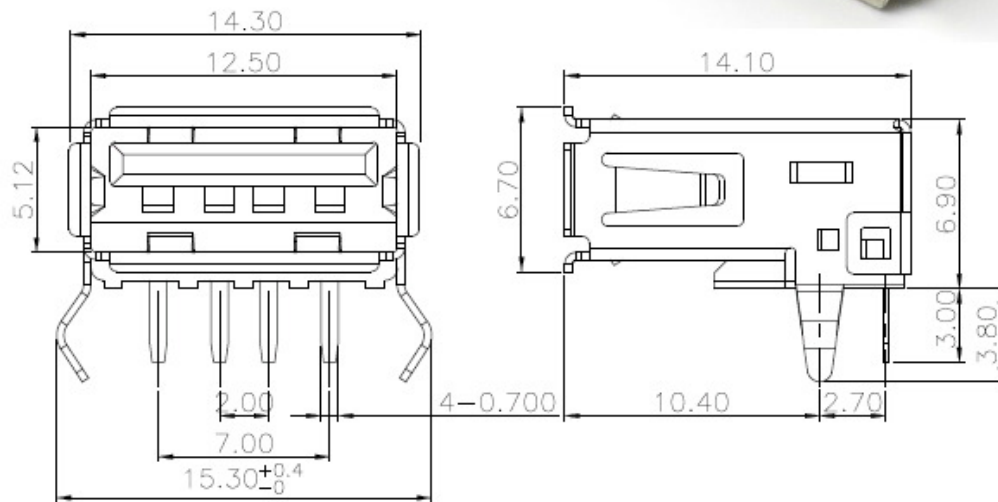

RECOMMENDED P.C.B HOLE LAYOUT

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 30V 1.5A
- 1-2.CONTACT RESISTANCE: $\leq 30\text{m}\Omega$
- 1-3.INSULATION RESISTANCE: $\geq 1000\text{M}\Omega$ DC 500V
- 1-4.WITHSTANDING VOLTAGE: AC 500V 1min
- 1-5.LIFE: 5,000 CYCLES

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE: 35N Max
- EXTRACTION FORCE: 10N Min

3.Finish:

3-1.TERMINAL:

GOLD $<1\mu\text{m}>$ PLATING ON CONTACT AREA
 TIN $<2-5\mu\text{m}>$ PLATING ON OTHER AREA
 NICKEL $<1-3\mu\text{m}>$ UNDERPLATING OVERALL

3-2.SHELL:

NICKEL $<1-3\mu\text{m}>$ PLATING




PART NUMBER: USB-AF-20-031

DESCRIPTION: USB A 2.0 90 DEG. 14MM
 WITH EDGE CURL

DIMENSION TOLERANCE $\pm 0.2\text{mm}$

P PRAN ELECTRONICS PVT. LTD.
INDIA.

ROHS COMPLIANT

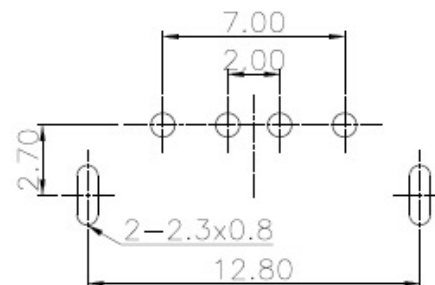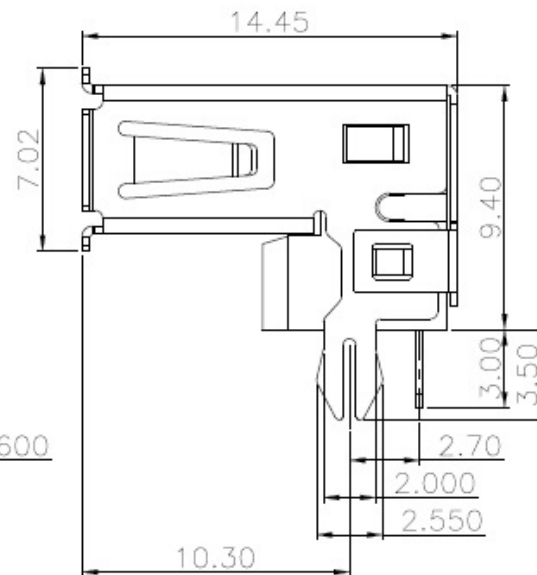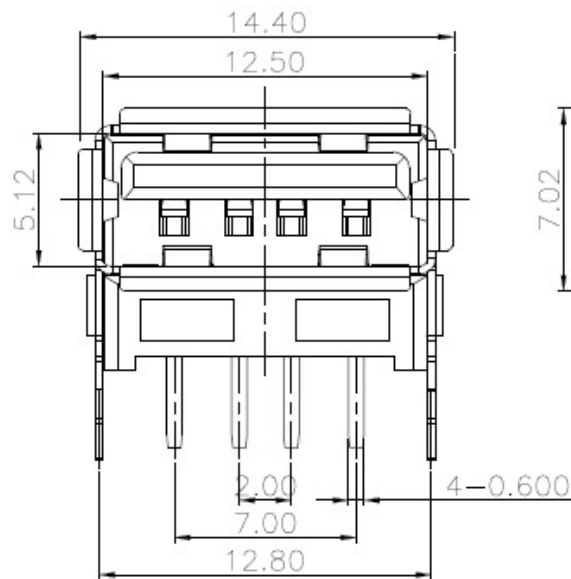

RECOMMENDED P.C.B HOLE LAYOUT

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 30V 1.5A
- 1-2.CONTATCT RESISTANCE: $\leq 30\text{m}\Omega$
- 1-3.INSULATION RESISTANCE: $\geq 1000\text{M}\Omega$ DC 500V
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min
- 1-5.LIFE:5,000 CYCLES

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE:35N Max
- EXTRACTION FORCE:10N Min

3.Finish:

3-1.TERMINAL:

GOLD<1u" > PLATING ON CONTACT AREA
TIN<2-5 μm > PLATING ON OTHER AREA
NICKEL<1-3 μm > UNDERPLATING OVERALL

3-2.SHELL:

NICKEL<1-3 μm > PLATING

PART NUMBER: USB-AF-20-032


DESCRIPTION: USB A 2.0 90 DEG. 14.5mm LONG
HEIGHT WITH EDGE CURL

DIMENSION TOLERANCE +/- 0.2mm

REV. 0 DATE 28/04/2020

P PRAN ELECTRONICS PVT. LTD.
INDIA.

ROHS COMPLIANT

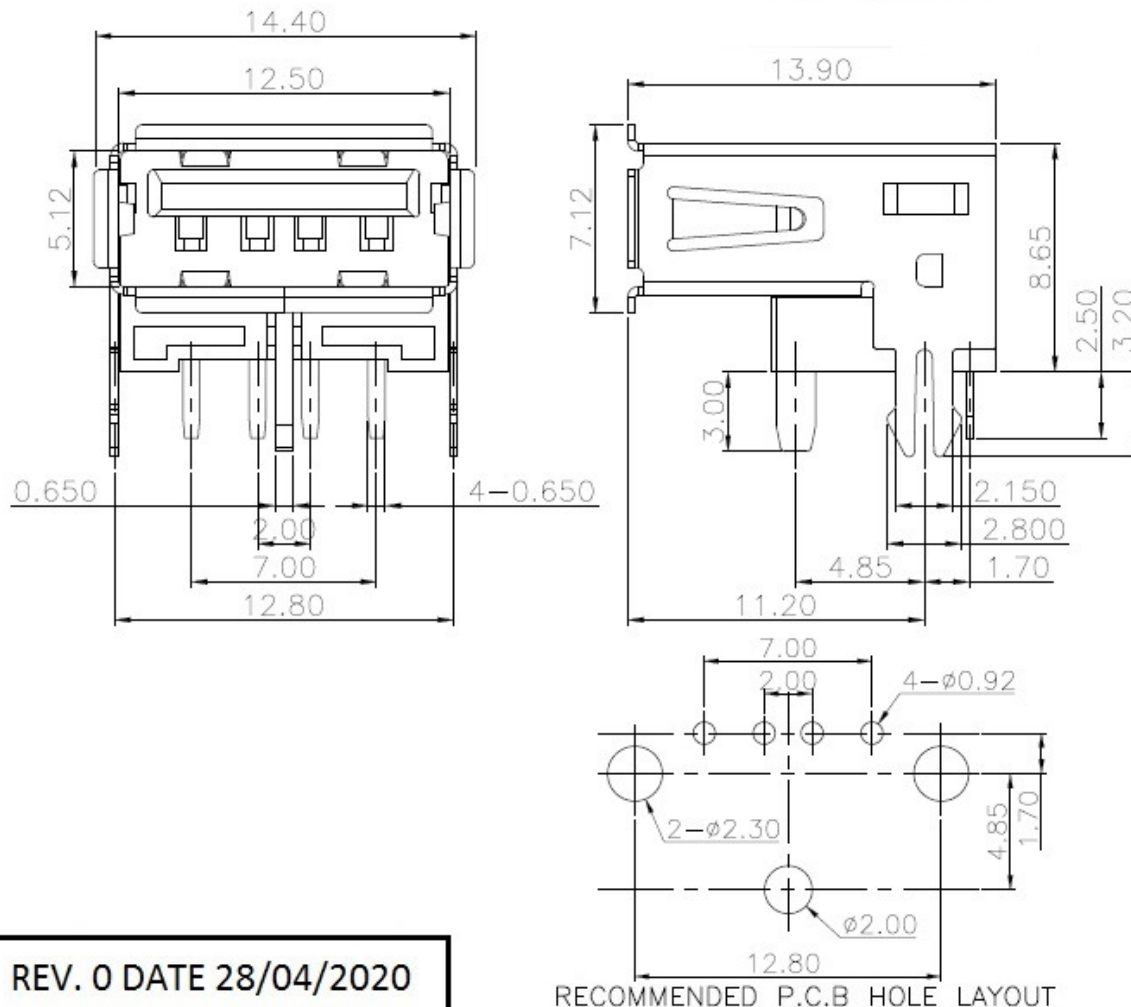

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING: DC 30V 1.5A
- 1-2.CONTATCT RESISTANCE: $\leq 30\text{m}\Omega$
- 1-3.INSULATION RESISTANCE: $\geq 1000\text{M}\Omega$ DC 500V
- 1-4.WITHSTANDING VOLTAGE:AC 500V 1min
- 1-5.LIFE:5,000 CYCLES

2.MECHANICAL CHARACTERISTICS:

- 2-1.INSERTION FORCE:35N Max
- EXTRACTION FORCE:10N Min

3.Finish:

3-1.TERMINAL:

GOLD $<1\mu\text{m}>$ PLATING ON CONTACT AREA
 TIN $<2-5\mu\text{m}>$ PLATING ON OTHER AREA
 NICKEL $<1-3\mu\text{m}>$ UNDERPLATING OVERALL

3-2.SHELL:

NICKEL $<1-3\mu\text{m}>$ PLATING

PART NUMBER: USB-AF-20-034

DESCRIPTION: USB A 2.0 90 DEG. 14MM LONG
 HEIGHT WITH CENTER PIN EDGE CURL

DIMENSION TOLERANCE $\pm 0.2\text{mm}$

P PRAN ELECTRONICS PVT. LTD.
INDIA.