



## Miniature Tact Switches: 3.5 X 6 - Type 60-1000

### 3.5 X 6 Standard

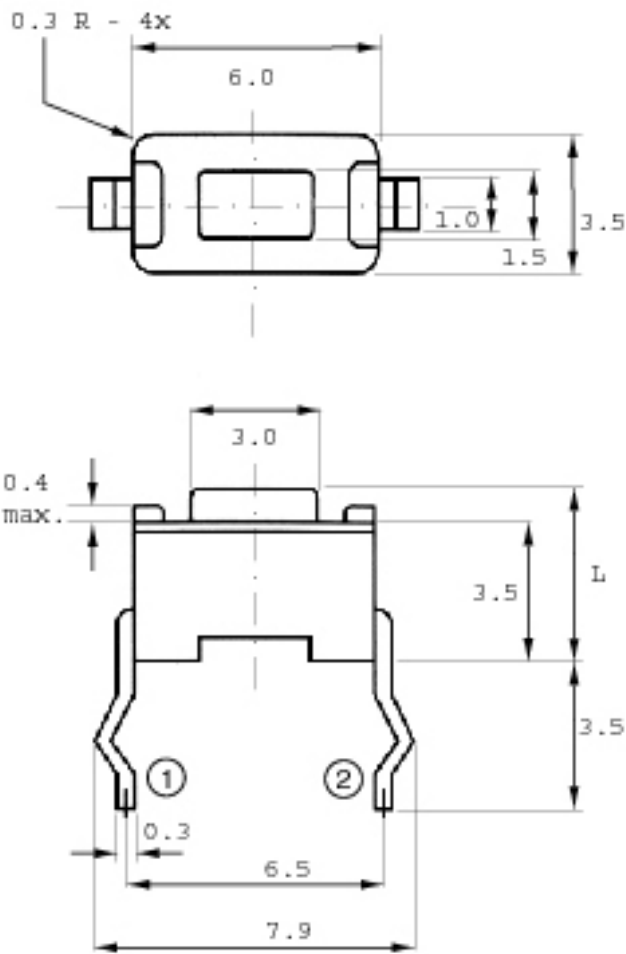


### 3.5 X 6 Straight Leads

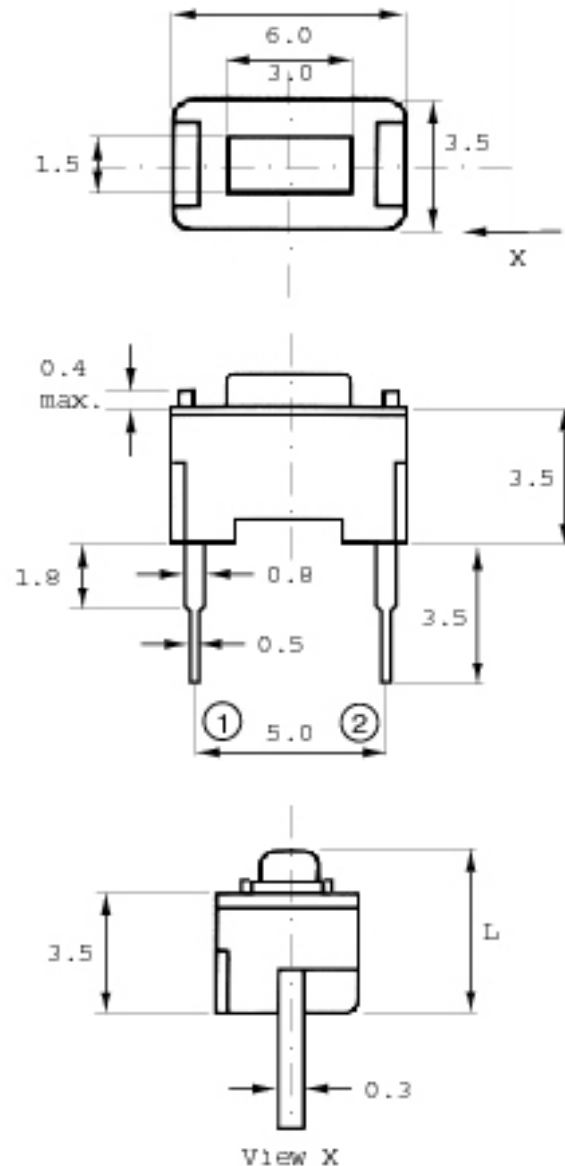


Circuit Diagram ( For both )



PCB Mounting Holes - Standard



PCB Mounting Holes - Straight Leads



Switch Code

Switch Code

		4.3	5.0	4.3	5.0
NOB HEIGHT L:					
OPERATING FORCE	130	60-1S1A	60-1S1B	60-1A1A	60-1A1B
	180	60-1S5A	60-1S5B	60-1A5A	60-1A5B
GRAM	260	60-1S3A	60-1S3B	60-1A3A	60-1A3B

CONTACT : METAL  
 RATING : 50 mA x 12 V DC  
 CONTACT RESISTANCE : 100 mΩ MAX  
 PROOF VOLTAGE : 250 V AC FOR 1 MIN  
 INSULATION RESISTANCE: 100 MΩ MIN/100 V DC  
 OPERATING LIFE : 35,000 CYCLES



PRODUCT: MINIATURE TACT SWITCH 60-1000

DIMENSIONS: MM TOLERANCE: + 0.2 MM

CHECKED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

**Pran Electronics Pvt. Ltd.**  
 52 G.I.D.C. Makaanpura Vadodara 390 010, INDIA.  
 Phone: [0265] 263 291 6 / 6920. Fax: 263 5918.  
 Email: info@pranelectronics.com