




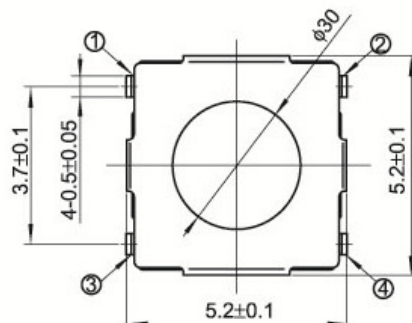


PART NUMBER: SMD-5252-01

DESCRIPTION: 5.2X5.2X0.9mm 5.2x5.2 SMD TACT SWITCH

ROHS COMPLIANT

LOW PROFILE









SPECIFICATIONS

Items		Standard
Operating temperature range		-20℃ to +70℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	100V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-5252-02

DESCRIPTION: 5.2X5.2X0.8mm 5.2X5.2 SMD TACT SWITCH

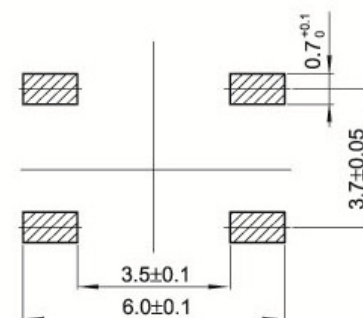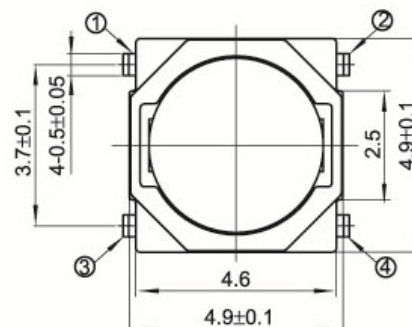

Dimensional tolerance +/- 0.2mm




PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-5252-03

DESCRIPTION: 5.2X5.2X1.0mm 5.2X5.2MM SMD TACT SWITCH


ROHS COMPLIANT

LOW PROFILE

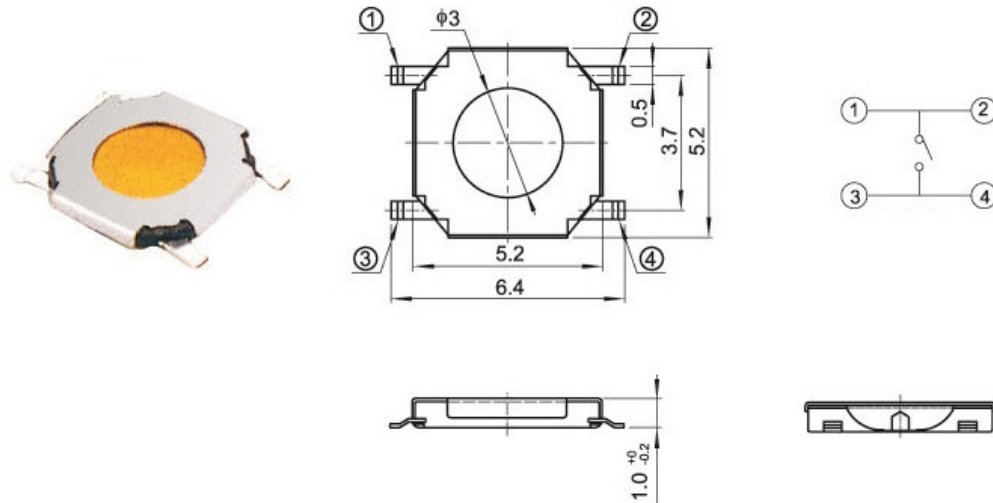

PART NUMBER: SMD-5252-04

DESCRIPTION: 5.2X5.2X0.80mm 5.2X5.2 SMD TACT SWITCH

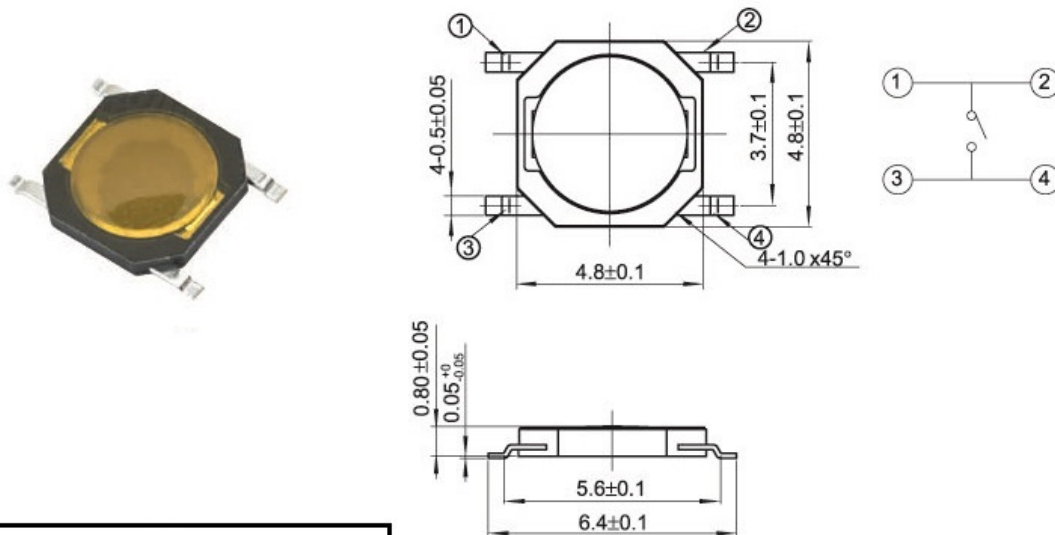

SPECIFICATIONS

Items		Standard
Operating temperature range		-30℃ to +85℃
Electrical performance	Rating	50mA. 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

Dimensional tolerance +/- 0.2mm



PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-5252-05-DP




DESCRIPTION: 5.2X5.2XHmm 5.2x5.2 SMD TACT SWITCH DUST PROOF

ROHS COMPLIANT

DUST PROOF



H
1.5
1.7
2.0
...





SPECIFICATIONS



Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-5252-06-DP

DESCRIPTION: 5.2X5.2XHmm 5.2x5.2 SMD TACT SWITCH DUST PROOF



H
1.5
1.7
2.0
...



Dimensional tolerance +/- 0.2mm









PRAN ELECTRONICS PVT. LTD.
INDIA.

PART NUMBER: SMD-5252-07-DP

DESCRIPTION: 5.2X5.2XHmm 5.2X5.2 SMD TACT SWITCH WITH EARTHING TERMINAL DUST PROOF

ROHS COMPLIANT

DUST PROOF


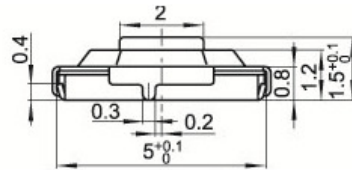


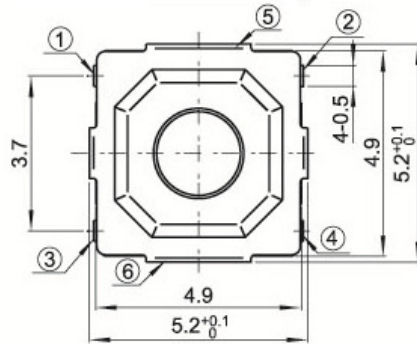



SPECIFICATIONS

Items		Standard
Operating temperature range		-30°C to +85°C
Electrical performance	Rating	50mA, 12V DC
	Insulation resistance	100MΩ min. 100V DC
	Dielectric strength	250V AC for 1 min.
	Contact resistance	100mΩ max.
Durability	Lifetime	200,000 Cycles
Mechanical performance	Operating force	160gf 250gf
	Travel	0.25 ± 0.1mm

PART NUMBER: SMD-5252-08-DP

DESCRIPTION: 5.2X5.2XHmm 5.2X5.2 SMT TACT SWITCH WITH EARTHING TERMINAL DUST PROOF

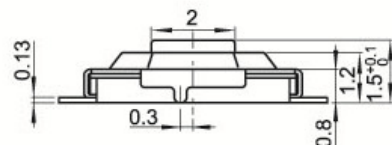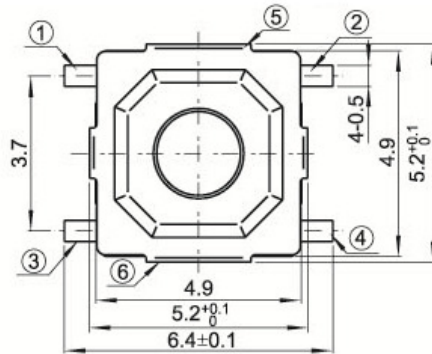

Dimensional tolerance +/- 0.2mm



PRAN ELECTRONICS PVT. LTD.
INDIA.