

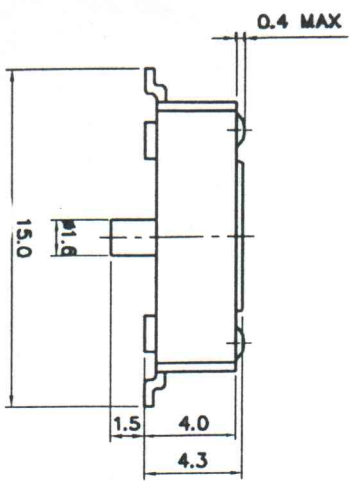


NO	PARTS	Q'TY	MATERIAL
1	CASE	1	NYLON46 / 66
2	TERMINAL	1	C2680R-EH
3	STEM	1	NYLON46
4	COVER	1	TP
5	C/PLATE	1	CS210R-EH



12 x 12 SMD Tact Switches

Specifications:

- Code: 60 - 3 M 3 A 4
- Code: 60 - 3 M 3 A
- Contact: Metal
- Rating: 50mA x 12 V DC
- Contact Resistance: 100 m Ohms max
- Operating Force: 260 ± 50gf
- Proof Voltage: 250 V AC 1 minute
- Insulation Resistance: 100 M Ohms minimum for 1 minute
- Soldering: Reflow soldering

- NYLON 46 material 4.3mm
- NYLON 66 material 4.3mm

50mA x 12 V DC

100 m Ohms max

260 ± 50gf

250 V AC 1 minute

100 M Ohms minimum for 1 minute



PRODUCT: TACT SWITCH 12 x12 TYPE: 60-3000

DIMENSIONS: MM TOLERANCE: ± 0.2 MM

CHECKED BY:	PRM	DATE:	8/2/05
APPROVED BY:	APM	DATE:	9/2/05

Pran Electronics Pvt. Ltd.

52 G.I.D.C. Makarpura
Vadodra 390 010, INDIA.
Phone: 0265 263 2916, 263 5920.
Fax: 0265 263 5918.
Email: info@pranelectronics.com